



### APPLICATION

Brass sleeve valve for fast filling medium troughs.

### FEATURES & BENEFITS

- Full flow design
- Robust brass body and arm
- Fully serviceable

### SPECIFICATIONS

**Working Pressure:** 0 - 1200 kPa (175 psi)

**Flow Rate:** 310 L/min (70 gal/min) @ 1200 kPa (175 psi)


**Temperature Range:** 1°C - 60°C (34°F - 140°F)

### AVAILABLE SIZES

- 20mm (¾")

### SPARES & ACCESSORIES

- Cord and nipple
- Use 150mm (6") ball float
- Service Kit (contains plunger/o-ring, washer, cotter pin)

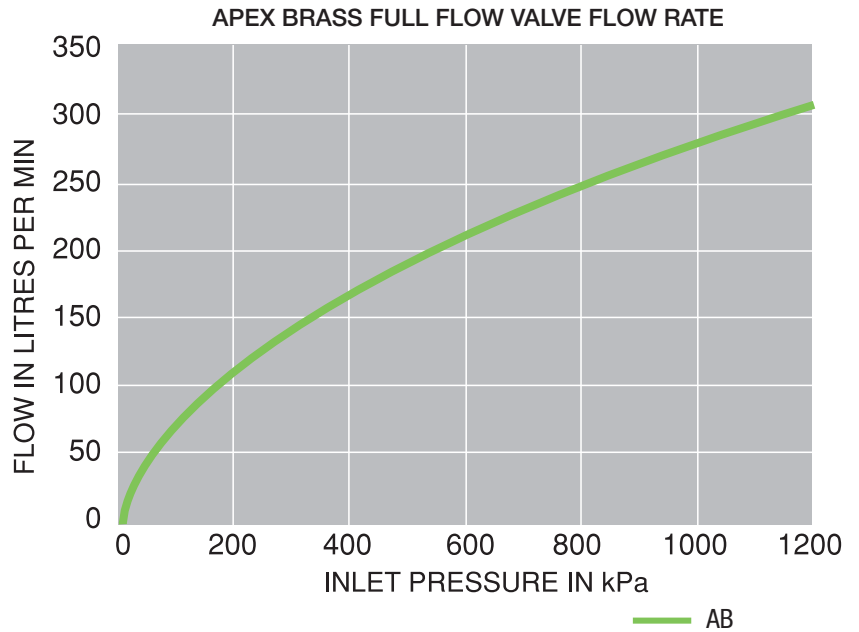

#### GRAPH CONVERSIONS

1kPa = 0.145psi = 0.01 bar

1 L/min. = 0.22 Imperial gpm